



eastar led



eastar led

Parameters

Model	MN10S	MN12S	MN14S	MN16S	MN19S	MN25S
Pixel Pitch(mm)	1.0	1.2	1.4	1.667	1.9	2.5
Physical Density(dot/m ²)	1000000	694444	513611	390625	275625	160000
LED Type	SMD0605	SMD0605	SMD1010	SMD1010	SMD1010	SMD2121
Module Size(mmxmm)	240x240	240x240	240x240	240x240	240x240	240x240
Brightness(cd/m ²)	800	800	800	800	1200	1200
Grey Scale	14Bit	14Bit	14Bit	14Bit	14Bit	14Bit
Refresh Rate(Hz)	≥1500	≥1500	≥1500	≥1500	≥1500	≥1500
Cabinet Resolution(PXxPX)	480x480	400x400	342x342	288x288	252x252	192x192
Max Consumption	≤252	≤252	≤252	≤252	≤252	≤252
Average Consumption	≤100	≤100	≤100	≤100	≤100	≤100
Cabinet Size(mm xmm)	480x480	480x480	480x480	480x480	480x480	480x480
Cabinet Weight(Kg)	9	9	9	9	9.3	9.3
Cabinet+Module Thickness(mm)	73	73	73	73	73	73
Protection Level	IP43					
Working Environment	Indoor					
Applied with 3D or not	Applied with 3D					

Suggested Applications

- Led screen installation location : indoor (Anywhere)
- Screen size : above 10sqm
- Best viewing distance: above 8 meters
- Largest view distance : more than screen diagonal 15 times (depend on screen size)
- Installation Method : wall-mounted; floor type; advertising billboard; hoisting.
- Installation factor : installation location, wall bearing, maintenance space



MINI SERIES

Indoor Adv & Event

EVENT MANAGEMENT
TUTTA LA TECNICA PER L'EVENTO

Event Management (IT)
via XXV Aprile, 68
20068 Peschiera B.
Milano - Italy
Tel. +39 0255301866
Fax +39 0251650666

Event Management (UK)
Copse Farm
Moorhurst LN
Holmwood - Dorking
Surrey RH5 4LJ London
Ph. +44 1306712451







Event Management (FR)
41, rue Barbés
94200 - Ivry sur Seine
Paris
Ph. +33 645457938

Event Management (BE)
93, rue de Florival
1390 - Grez Doiceau
Ph. +32 (0) 475 462 289


MiNi/P1.667
Indoor Adv & Event



Features

-  **Fast Installation**
Fast lock with precise positioning function to connect left and right cabinets within 10 seconds, preferred for stage rental screen.
-  **Easy Maintenance**
Magnetic module structure for front maintenance, easy to dismantle and install within 30 seconds, preventing the module from damage with special protection design.
-  **Module Calibration**
Calibration data written into the module procedure for uniformity of the brightness and color, achieving clear and natural images.
-  **High Refresh Rate**
Smooth and vivid videos without ripple and blank, clear images restored accurately, bringing the audience greatest visual enjoyment.
-  **Low Brightness & High Gray-scale**
High gray-scale available even below 200CD brightness, the layering and vividness of the video superior to the traditional screen.
-  **Super Stability**
High quality components and elaborate processing craft, effectively reducing the blind spot rate even working under the severe environment.

Module Details

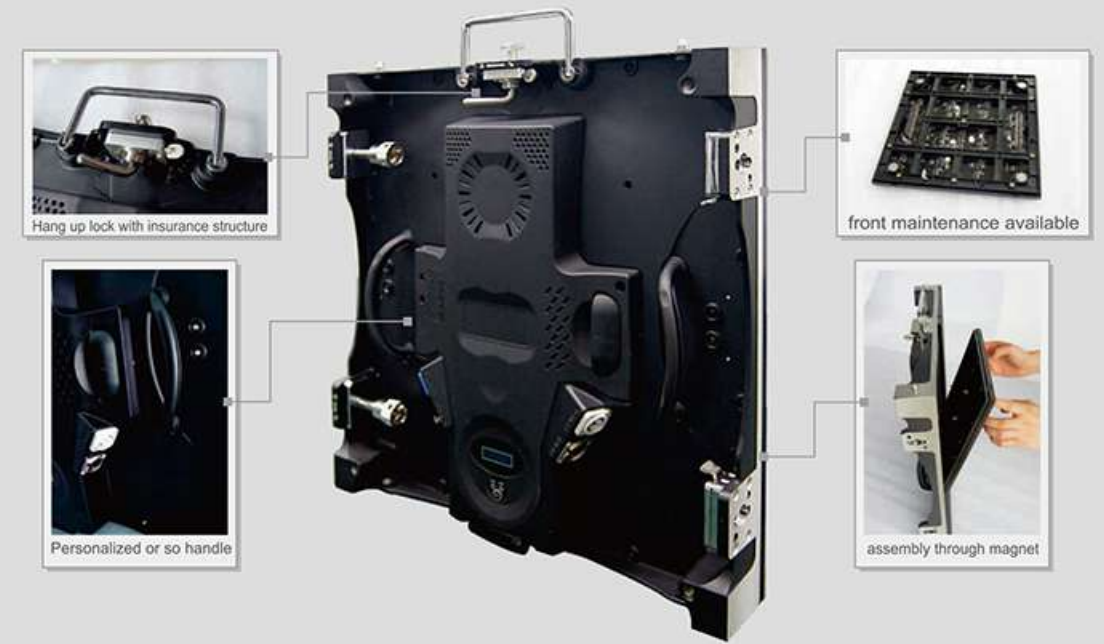

Reference Cases

