

Di-VentiX II - Ref. DVX8044

Multi-Layer, Hi-Resolution Mixer, Scaler, Seamless Switcher, with Keying/Edge Blending system with 4 Scalers



INPUTS



OUTPUTS

FEATURES



Di-VentiX II at a glance

- ▶ 4 Live Layers
- ▶ 3 modes: Seamless Mixer, 8x2 Seamless Matrix or Edge Blending
- ▶ Full Digital In/Out Processing
- ▶ Very powerful and easy-to-use Soft Edge Blending mode
- ▶ Video Output option in order to monitor the Program/Preview at the same time

Key features


- ▶ **8 inputs among 16 plugs**
 - 4 x DVI-I
 - 4 x 3G/HD/SD-SDI
 - 4 x Universal Analog (Computer formats up to 2K)
 - 4 x Universal Video (SDTV, EDTV, HDTV)
- ▶ **Outputs**
 - 2 Analog and Digital Outputs: Main & Preview
 - HDTV and Computer Formats up to 2K
 - RGBHV, DVI-I and 3G/HD/SD-SDI
 - Optional Video Output: SD/HD-TV Analog and Digital
- ▶ **Operation modes & Effects**
 - 3 Operation modes: Mixer, Sync Matrix and Edge Blending
 - 4 Live Layers
 - 8 Full Frames, 8 Logo Memories
 - Luma/Chroma Key/DSK
 - 16/9, 4/3, special sized and cropped output
 - Pan & zoom resizing up to 1000%
 - Cut, Fade (Dissolve), Slide, Transparency
 - Moving PIPs
 - PIP Border Smooth/Shadow/Smooth Edge (Edge: 1 color, 1 width, 1 height)

References & Options

- ▶ DVX8044: Di-VentiX II
- ▶ DVX8044-A: With Audio Switcher Option
- ▶ DVX8044 -VO: With Video Output Option
- ▶ DVX8044-VO-A: Di-VentiX II with Video Output & Audio Switcher Options
- ▶ OPT-8044-A: Audio Switcher Option
- ▶ OPT-8044-VO: Video Output Option


To Control Di-VentiX II

- ▶ Remote Control Software (RCS): Di-VentiX II (Supplied)
- ▶ ORC50: Orchestra
- ▶ RKD8044-T: Remote Keypad with T-Bar

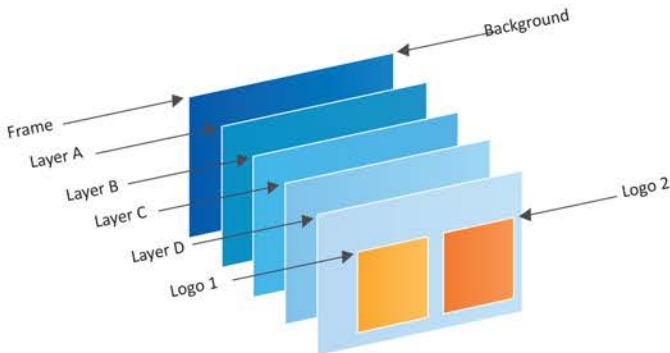

ANALOG WAY®
Pioneer in Analog. Leader in Digital

► Diagram:

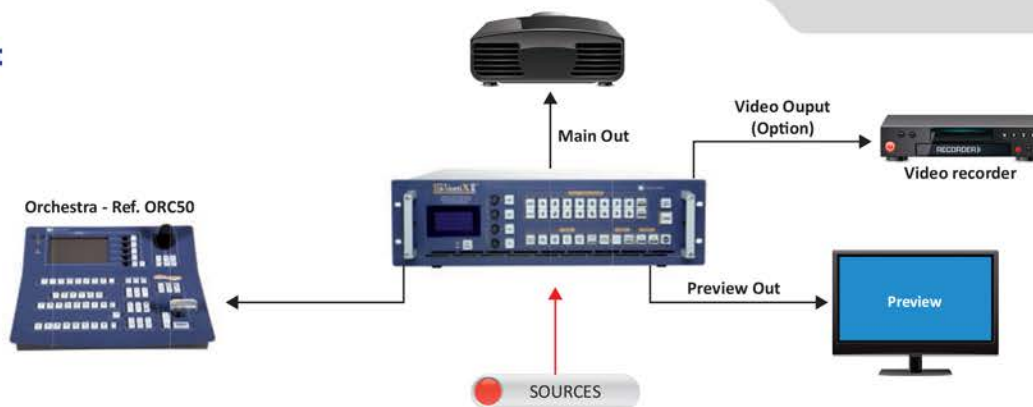

Technical Specifications

► 8 Universal inputs

Analog inputs (All inputs #1 to #8) SD-TV

- Composite, S.Video, YUV, RGB or RGBS
- NTSC: 15.735kHz/60Hz
- PAL/SECAM: 15.625kHz/50Hz

ED/HD-TV

- RGB, RGBS or YUV
- 480p/60 Hz – 576p/50 Hz – 720p, 1080i, 1035i/50 or 60Hz – 1080p/24, 25, 30, 50 or 60 Hz – 1080psF/24, 25 or 30 Hz

Computer

- RGBHV, RGBS or RGB
- Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
- Horizontal frequency from 31.5 to 130 kHz
- Vertical frequency up to 130 Hz
- FpxMax = 165MHz

► Digital inputs (inputs #1 to #4 only)

- DVI-I: SD-TV, ED-TV, HD-TV and Computer formats
- SDI: SD-TV & HD-TV – YUV/10bits/4:2:2, 3G-SDI
- Automatic synchronization detection

► Main and Preview outputs

Computer Digital and Analog:

- RGBHV, RGBS or RGB and DVI
- Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
- Vertical frequency 50, 60, 72 or 75 Hz depending on Output format
- FpxMax = 165MHz

HD-TV:

- RGB, RGBS or YUV, DVI and HD-SDI, or 3G-SDI
- 720p, 1080i, 1035i/50 or 60Hz – 1080p/24, 25, 30, 50 or 60Hz – 1080psF/24, 25 or 30 Hz

► Operation Standards

SMPTE 259M, SMPTE 274M, SMPTE 292M, SMPTE 296M and SMPTE 424M

► Optional Video outputs

- Analog and Digital SD/HD-TV
- SD-TV: NTSC/PAL, S.Video, RGB/YUV, DVI-D and SDI
- HD-TV: RGB/YUV, DVI-D and HD-SDI, or 3G-SDI
- HD Formats: 720p, 1080i/50 or 60Hz – 1080p/24, 25, 30, 50 or 60 Hz – 1080psF/25 or 30 Hz (1080p/50 and 60 Hz is not available in HD-SDI)
- Computer Digital: Resolution up to 1600x1200/60Hz, 1920x1200/60Hz or 2048x1080/60Hz. Vertical Frequency: 50, 60, 72, 75 Hz depending on output format. Fpx Max = 165 Mz

► Analog Genlock

- Input: HD Black 3 levels or SD Black Burst
- Output: Active loop through

► Optional Audio Stereo In/Out

- **Input:**
 - 8 Audio stereo inputs + 1 Auxiliary
 - Balanced/Unbalanced
 - Vi = +18dBu
 - Zi = 20 kOhms (Unbalanced)/40 kOhms (Balanced)
 - Adjustable Level per input
- **Output:**
 - 2 independent outputs
 - Balanced/Unbalanced
 - Vo = +18 dBu/300 Ohms (Unbalanced)
 - Vo = +24 dBu/600 Ohms (Balanced)

► User Controls - front panel

- Standby On/Off
- Input, Layer and Logo direct access

- Freeze/Black
- User defined layer properties
- Aspect ratio: 1/1 – Cropped - Full Screen
- Large Graphic VFD screen with control knobs and buttons for easy and fast access to menus and adjustments

► Connectors - rear panel

• Input #1 to #4 connectors:

- DVI-I Female: (Digital and Analog SD/ED/HD-TV and Computer)
- BNC (SD/HD-SDI)

• Input #5 to #8 connectors:

- HD15-F and 4xBNC: (Analog SD/ED/HD-TV and Computer)

• Main and Preview output connectors:

- Each output is fitted with:
- DVI-I Female: (Digital and Analog) RGB or YUV
- HD15 Female: RGB or YUV
- BNC: HD-SDI
- BNC (x5): RGB or YUV

• Miscellaneous:

- BNC (x2): Analog Genlock In and Loop Out
- RJ45 (x2): Proprietary Device Synchronization
- MCO 8 pins: GPI/O
- DB9: RS232 for remote control and update
- RJ45: Ethernet connection for remote control and update
- AC main connector with On/Off switch

• Optional Video Out:

- DB9-F: NTSC/PAL, S.Video, SD/HD-RGB/YUV
- BNC-F: SD/HD-SDI
- DVI-D-F: SD/HD-TV

• Optional Audio:

- 5 pin MCO connectors: 9 for Inputs and 2 for Outputs

Dimensions :

- 3U, 19"
- D 16.5" x W 19" x H 5.25"
- D 420 mm x W 480 mm x H 133 mm

Weight:

- 7 kg
- 15.43 lbs

Power Supply:

Internal, universal, automatic, 100-250 V;
50/60 Hz; 250W(UL, CSA, GS, CE)

Supplied with:

- 1 x Power supply cord
- 1 x MCO 8 Pin connector
- 1 x Remote Control Software (RCS) (PC only)*
- 1 x User Manual (PDF Version)*
- 1 x Quick Start Guide*

Warranty:

3-year warranty on parts and labor back to factor



* All User Manuals and Quick Start Guides are also available on www.analogway.com

Specifications subject to change without prior notice

All technical specifications are available on our website

Europe, Middle East and Africa - ANALOG WAY SAS - Tel: +33 (0)1 81 89 08 60 / Fax: +33 (0)1 57 19 04 54 / Email: saleseuro@analogway.com
The Americas - ANALOG WAY Inc. - Tel: +1 212 269 1902 / Fax: +1 212 269 1943 / Email: salesusa@analogway.com
Asia Pacific - ANALOG WAY Pte Ltd - Tel: +65 62 92 58 00 / Fax: +65 62 92 52 05 / Email: sales@analogwayasia.com

Follow us

DX8044 28/01/2014